

Commercial Grade Dispensable Epoxy Absorber



MATERIAL

Magnetic epoxy resin




FEATURES

- Reduces RF signals, suppresses standing waves and RF noise
- Adheres well to metal surfaces, no need for die-cutting or tape
- Electrically equivalent to cavity resonance sheet absorber products


PROPERTIES	CR-DE-2
Color	Dark Grey
Density	3.11 g/cm ³
Softness	65 Shore A
Operatering Temperature	-55 to 125 °C

PROPERTIES	CR-DE-2
Flammability Rating	UL 94 HB
Minimum Thickness	0.5 mm
Minimum Thickness	Data Pending


Permittivity and Permeability

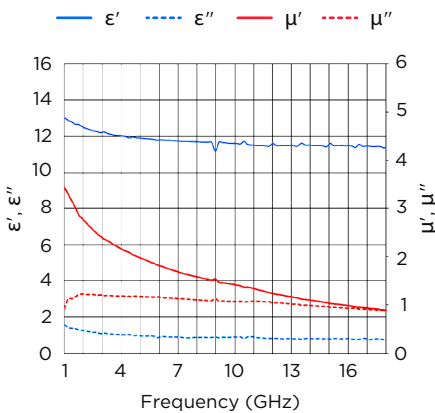

Attenuation

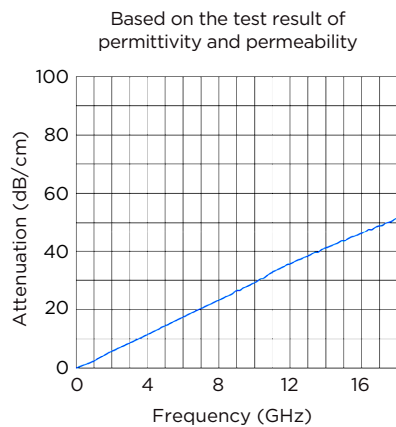

Cavity Resonance

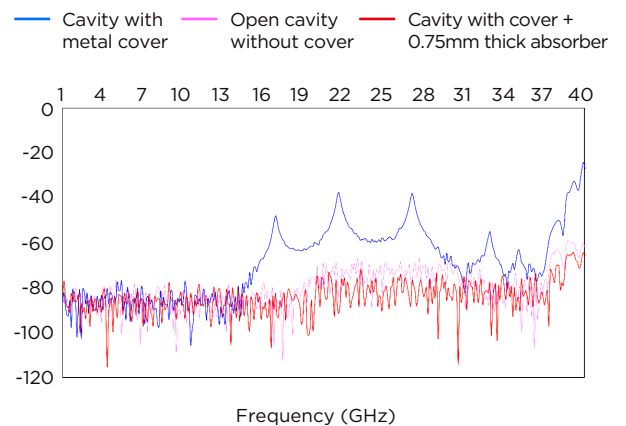

GET IN TOUCH

EMAIL: SUPPORT@TENNMAX.COM

TEL: +1 360-567-0707



TENNMAX.COM