


High Performance Cavity Resonance Absorber Pad



MATERIAL

Silicone rubber

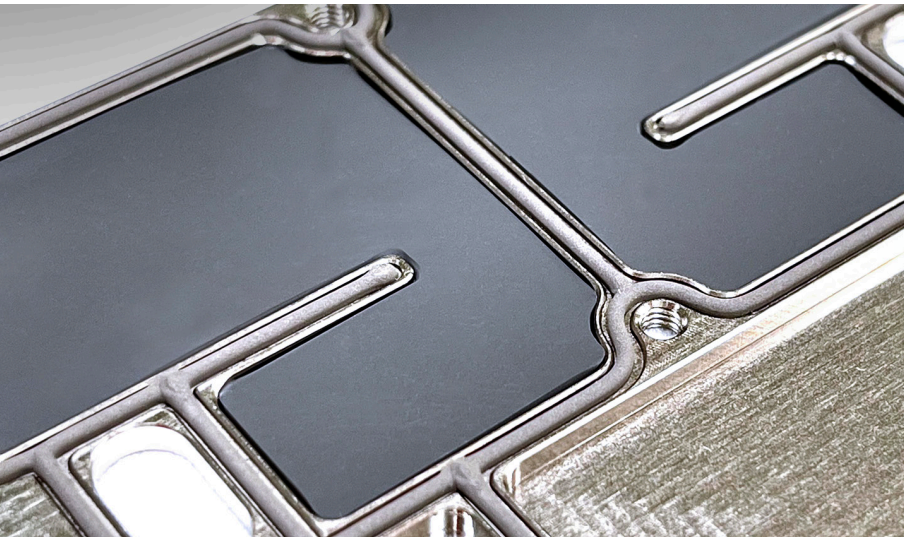


FEATURES

- Superior RF absorption
- Can be laser, knife, waterjet, or die-cut to fit in various cavity sizes
- Low outgassing
- RoHS compliant and halogen free

PROPERTIES	CR-SS-3			
Thickness	0.25 mm	0.50 mm	0.75 mm	1.00 mm
Adhesive Thickness	0.12 mm			
Elastomer	Silicone			
Density	4.30 g/cm ³			
Softness	45 Shore A			


PROPERTIES	CR-SS-3
Operating Temperature	-65 to 200 °C
Flammability Rating	UL94V-0
Standard Sheet Size	12 inch x 12 inch
Outgassing (with PSA)	Data Pending
Available with or without Pressure Sensitive Adhesive	

Permittivity and Permeability

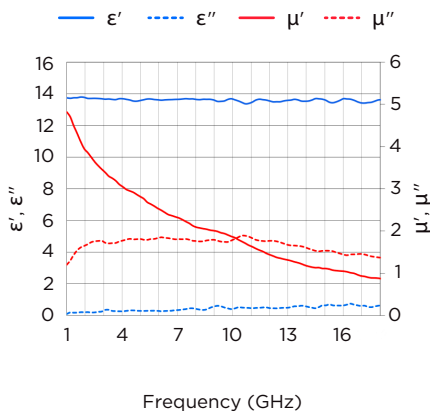


Attenuation

Based on the test result of permittivity and permeability

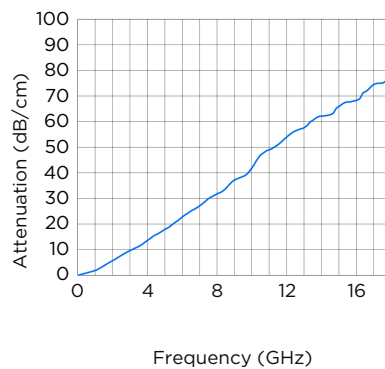

Cavity Resonance

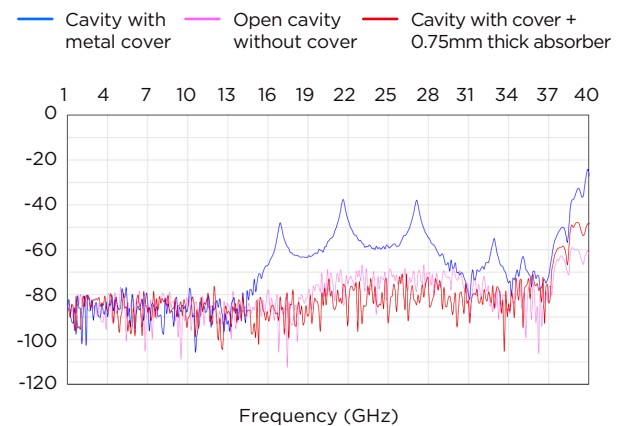

GET IN TOUCH

EMAIL: SUPPORT@TENNMAX.COM

TEL: +1 360-567-0707



TENNMAX.COM

This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery. V2