

High Frequency

Cavity Resonance Absorber Pad

**MATERIAL**


Silicone rubber

**FEATURES**


- Superior high frequency RF absorption
- Can be knife, waterjet, or die-cut to fit in various cavity sizes
- RoHS compliant and halogen free

PROPERTIES	CR-HF-SS-2
Thickness	0.50 mm to 2.00 mm
Adhesive Thickness	0.125 mm
Elastomer	Silicone
Density	1.80 g/cm ³
Softness	70 Shore A

PROPERTIES	CR-HF-SS-2
Operating Temperature	-55 to 200 °C
Flammability Rating	UL94V-0
Standard Sheet Size	12 inch x 12 inch
Available with or without Pressure Sensitive Adhesive	

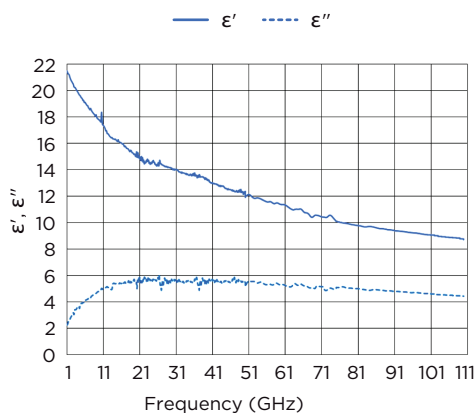Measured Complex Permittivity**Attenuation**

Based on the test result of permittivity and permeability

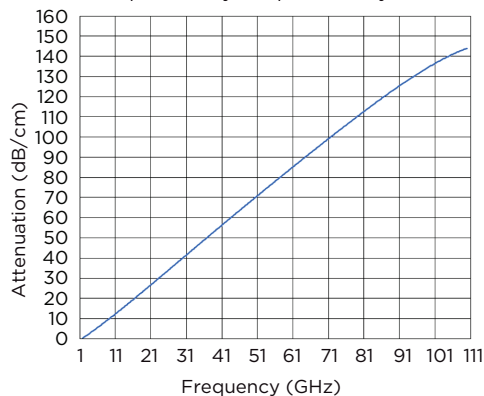

GET IN TOUCH

EMAIL: SUPPORT@TENNMAX.COM

TEL: +1 360-567-0707

This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery. V3



TENNMAX.COM